Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

CUST. NAME	N0037	DATE	JUN.06,02'
DESCRIPTION	Toroidal Coil Inductors	TYPE	
GS PART NO.	GSTCV9452-151K	DWG. NO.	015508
CUST. PART NO.	542-5712	CUST. DWG. NO.	

DIM	Unit in mm
A	31.75(max)
B	15.88(max)
C	15.0±1.0
D	0.8±0.05
E	
F	
G	
H	
I	
J	
K	
L	
M	
N	

MECHANICAL MEASUREMENTS

Jameco Part Number 208320

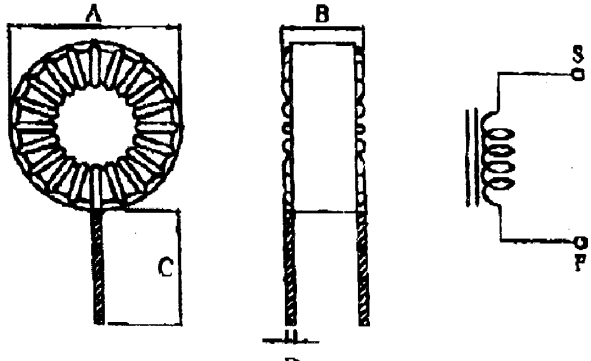

C:TINNED.

ELECTRICAL MEASUREMENTS & TEST EQUIPMENT

NO.	L (uH) @1KHz/0.25V	L (uH) +IDC @1KHz/0.25V	SRF(min) MHz	RDC(max) (Ω)	IDC(max) (A)
EQU.	CH-101	CH-101 CH 1320	HM 9460	GOM-801G	CH 1320
SPE.	150±10%	85.0(min)		0.060	4.75
1	156.6	96.2		0.048	
2	153.1	96.0		0.048	
3	154.0	95.9		0.047	
4	155.5	96.4		0.048	
5	153.9	95.6		0.048	
6					
7					
8					
9					
10					

Remark :

CT39(OR EQUI.)
CORE: T94-52

WIRE: 0.8 ϕ 2UEW NY

TURN: 51Ts(IN,REF.)

耐熱膠布：6mmx169mm.

※ VARNISH.

DRAW BY: 6/7/02

CHECKED BY: JA 07 2002

APPROVED BY: 6/7/02